



PERSONAL
COMPUTERS



SMALL
COMPUTERS
NETWORK

Win Dialog Plus

400-650 VA
single-phase

Win Dialog Plus 400-650 VA



The **WIN DIALOG** series includes the 400-550-650VA models and uses digital technology. The load is powered from the mains through an AVR to stabilise brownout, sag and surge voltages, and EMI filters to suppress spikes and transients. When the mains fails, the load is powered by the inverter with a pseudo sinewave to provide sufficient runtime for computer system shutdown using the **PowerShield³** software supplied as standard.

CHARACTERISTICS

- Mains power supply stabilisation and filtering (technology with AVR and filters for atmospheric disturbance suppression)
- Integrated protection for PC networks and telephone line/modem connections RJ11/45
- Cold start capability: the UPS can power up without a mains supply present
- High reliability with built-in battery test feature

- Supplied with 2 output cables
- GS-TÜV certification
- Microsoft certified product


ADVANCED COMMUNICATION

- Advanced, multi-platform communication for all operating systems and network environments: PowerShield³ monitoring and shut-down software included, with SNMP agent, for Windows 9x, ME, NT 4.0, 2000, XP, Vista and 2003 server; Mac OS X, Linux, Novell and most popular Unix operating systems.
- Advanced communication (standard RS232 interface: models WP40-WP55-WP65)
- Plug and Play function

2 YEAR WARRANTY



MODELS	WD 40	WP 40	WP 55	WP 65
POWER	400VA/240W	400VA/240W	550VA/330W	650VA/400W
INPUT				
Rated voltage	220-240 Vac			
Voltage range	230 Vac (+20/-26%)			
Frequency	50/60 Hz auto sensing			
OUTPUT				
Voltage on mains operation	230 Vac (-8%, +10%)			
Voltage on battery operation	230 Vac (+/- 5%)			
Frequency on battery operation	50 or 60 Hz (+/- 0.5%)			
Waveform from battery/inverter	Pseudo sinewave			
BATTERIES				
Type	VRLA AGM Maintenance-free lead-acid			
Recharge time	6-8 h			
ENVIRONMENTAL				
Weight (kg)	5.8	5.8	6.2	6.5
Dimensions (hwd) (mm)	152 x 110 x 325			
Tel/Modem protection	RJ11/45 connectors			
Communication	-	RS232 serial port		
Safety compliance	EN 62040-1-1 and Directives 73/23 EC, 93/68 EC, EN 62040-3			
EMC conformance	EN 62040-2 and Directives 2004/108 EC, 93/68 EC			
Marks	CE; GS/TÜV			
Operating temperature	0°C - 40°C			
Colour	Dark grey			
Altitude and relative humidity	6000 meters max. elevation, < 95% non condensing			
Accessories provided	2 output supply cables, 1 serial cable, 1 telephone cable; user guide			

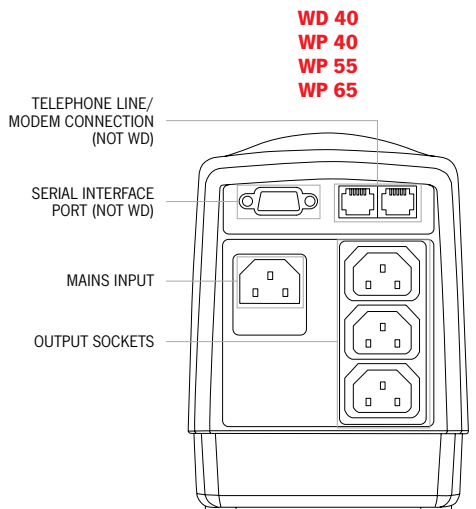

TECHNICAL DETAILS

